

NITRON

LIGHT TRUCK & TRUCK TIRES





CL TROLLA

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
900-20	16	7.0	1045	259	20.7	2575	2240	760	725
1000-20	16	7.5	1074	279	20.6	2900	2575	760	725
1000-20	18	7.5	1074	279	20.6	3000	2650	825	760



FM

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
650-14	8	4.5	700	182	10.3	850	800	415	415
650-14	10	4.5	700	182	10.3	925	875	500	500
700-15	10	5.5	763	202	11.8	1060	925	520	520
700-15	12	5.5	765	204	11.8	1175	1030	620	620
750-15	12	5.5	784	211	12.5	1360	1215	620	620
750-15	14	5.5	784	211	12.5	1450	1285	725	725
700-16	12	5.5	784	202	11.8	1215	1065	620	620
700-16	14	5.5	784	202	11.8	1215	1065	620	620
750-16	14	6.0	810	215	11.5	1500	1320	690	690
750-16	16	6.0	812	218	11.5	1550	1360	105	105
825-16	16	6.5	858	232	13.7	1700	1600	655	655
1000-20	16	7.5	1072	285	196	2900	2575	760	725
1100-20	16	8.0	1094	299	15.7	3120	2725	115	105
1200-20	18	8.5	1135	320	14.3	3650	3250	115	105
825-20	14	6.5	988	242	14.3	2180	1900	793	724
900-20	16	7.0	1031	264	14.6	2575	2240	760	725



HCL SUPER

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
825-20	14	6.5	1012	244	19.4	2180	1900	115	105
1100-20	18	8.5	1100	300	22	3250	2800	120	110



LUG 40

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
1000-20	16	7.5	1076	278	19.9	2900	2575	760	725



LUG PLUS

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
750-16	16	6.0	825	220	17.5	1550	1360	105	105
1000-20	16	7.5	1071	274	19.6	2900	2575	760	725



MILE XL

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
1000-20	18	7.5	1078	280	18.2	3000	2650	825	760



RIB XL

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
1000-20	18	7.5	1071	272	17	3000	2650	825	760



STAMINA

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
825-16	16	6.5	865	234	17	1700	1600	655	655



TURBO RIB PLUS

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
750-16	16	6.0	812	218	11.5	1550	1360	724	724
1000-20	16	7.5	1068	278	17.3	2900	2575	760	725



XL SUPER

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
1000-20	16	7.5	1067	278	16.5	2900	2575	760	725
1000-20	18	7.5	1067	278	16.5	3000	2650	825	760




XL 1

Size	PR	Std Rim	Outside Diameter	Section Width	Tread Depth	Max Load (Kg)		Max Pressure (Kpa)	
			mm	mm	mm	Single	Double	Single	Double
1000-20	16	7.5	1067	278	16.5	2900	2575	760	725



RHINO PLUS

Size	PR	Std Rim	Outside Diameter mm	Section Width mm	Tread Depth mm	Max Load (Kg)		Max Pressure (Kpa)	
						Single	Double	Single	Double
155R12C	8	4.5	555	154	7.8	560	530	450	450
165R13C	8	4.5	599	167	8.9	670	630	450	450
185R14C	8	5.5	653	189	9.4	850	800	450	450
195R14C	8	5.5	670	197	9.6	950	900	450	450
195R15C	8	5.5	693	196	10.1	950	900	450	450

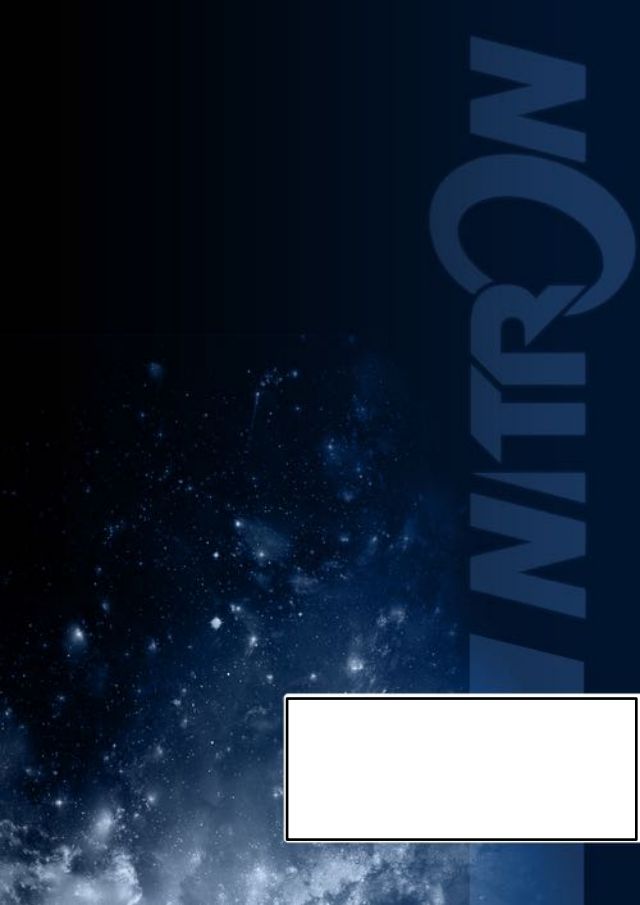

WITRON

